

COMMERCIAL STORAGE

Commercial Storage Tanks

American Standard[®]

WATER HEATERS

www.americanstandardwaterheaters.com

Features

- **FULL SIZE HAND-HOLE CLEANOUT** for convenient tank inspection and removal of sediment deposits.
- **ASME CONSTRUCTION AVAILABLE**

Performance

- **HFO FOAM INSULATED** – 2 inch-thick, environmentally-friendly insulation foam.

Quality

- **HEAVY GAUGE STEEL TANK** for extra years of trouble-free service.
- **GLASS-LINED TANK** with DuraGlas™ and fired at 1600°F for optimum protection from the effects of corrosion.
- **DUAL MAGNESIUM ANODE RODS** to prolong tank life.
- **PRESSURE TESTED AT THE FACTORY** – All tanks are hydrostatically tested and certified at 300 PSI test pressure and 150 PSI working pressure.
- **5-YEAR LIMITED TANK WARRANTY** and 1-year limited parts warranty.

80, 120, & 200 Gallon Capacities
ASME Options Available



SPECIFICATIONS AND APPLICATION DATA


www.americanstandardwaterheaters.com

DIMENSIONS IN INCHES

MODEL NUMBER	NOMINAL CAPACITY [GAL.]	JACKET DIAM A	FLOOR TO							
			TOP OF TANK B	TOP HOT WATER OUTLET C	TOP CIRC. CONNECTION D	BOTTOM CIRC. CONNECTION E	AQUASTAT D	THERMOMETER F	SIDE T&P F	DRAIN VALVE G
ST-80-AS	80	26 ¼	56 ¼	56 ½	16 ¼	11 ¼	16 ¼	48 ½	48 ½	6 ½
ST-120-AS	120	28 ¼	68	68 ¼	16 ¼	11 ¼	16 ¼	60	60	6 ½
ST-120-ASME	120	28 ¼	68	68 ¼	16 ¼	11 ¼	16 ¼	60	60	6 ½
ST-200-ASME	200	32	78	79 ½	16 ¼	11 ¼	16 ¼	70 ¼	70 ¼	4 ½

CONNECTION SIZES

MODEL NUMBER	STORAGE CAPACITY	TOP HOT WATER (in.)	CIRCULATION LINES (in.)	AQUASTAT & THERMOMETER (in.)	T&P VALVE (in.)
ST-80-AS	80	2	2	3/4	1
ST-120-AS	120	2	2	3/4	1
ST-120-ASME	120	2	2	3/4	1
ST-200-ASME	200	2 ½	2 ½	3/4	1

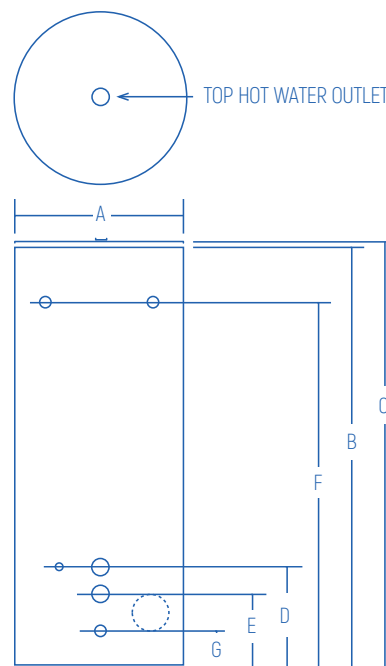

SAMPLE SPECIFICATION

Commercial hot water storage tank shall be AMERICAN STANDARD WATER HEATERS model _____ having a storage capacity of _____ gallons. Water heater tank interior shall be glass lined with Dura-Glas™, furnished with two anode rods and insulation shall be non-CFC foam.