

# HEAVY DUTY LOW NO<sub>x</sub> ATMOSPHERIC

Residential Gas Water Heaters

*American Standard*<sup>®</sup>

WATER HEATERS

[www.americanstandardwaterheaters.com](http://www.americanstandardwaterheaters.com)

## Features

- **TRADITIONAL MECHANICAL GAS VALVE** – Simple and maintenance free operation.
- **SPARK IGNITER** – Easy push button pilot lighting.
- **ADJUSTABLE TO 160°F** when installed with a mixing valve.
- **COMBUSTION CHAMBER DOOR** allows easy servicing of the burner and pilot components.
- **FACTORY INSTALLED ENERGY CUT-OFF SYSTEM** – Automatic thermostat with built-in gas pressure regulation also incorporates energy cut-off switch to prevent abnormally high water temperature for added safety.
- **TURBULENCE – INDUCING DIP TUBE** engineered to reduce sediment build-up inside the tank.
- **FULL FLOW BRASS DRAIN VALVE** factory provided & installed, allows easy and quick drainage.
- **TEMPERATURE AND PRESSURE RELIEF VALVE** factory provided & can be relocated from side to optional top of the heater.
- **HEAVY DUTY LEGS** ensure sturdy and stable installation.

## Performance

- **UP TO 0.60 UEF**
- **UP TO 124 GALLONS FIRST HOUR RATING (FHR)**
- **HFO FOAM INSULATED** – 2 inch-thick, environmentally-friendly insulation foam saves energy, reduces fuel cost by maximizing heat retention, and contributes to overall energy efficiency.
- **LISTED WITH INTERTEK** in accordance with ANSI Z21.10.3 as an automatic storage and/or automatic circulating tank heater. Listed to meet NSF/ANSI 5 Standards.
- **ASHRAE** – Standard 90.1 1999 addendum 90.1b. compliant.
- **AHRI CERTIFIED** – Energy Efficiency tested in accordance with D.O.E. test procedures.
- Meets or exceeds the requirements of National Appliance Energy Conservation Act.

## Quality

- **HEAVY GAUGE STEEL TANK** for extra years of trouble-free service.
- **GLASS-LINED TANK** with DuraGlas™ and fired at 1600°F for optimum protection from the effects of corrosion.
- **MAGNESIUM ANODE ROD** to prolong tank life.
- **CHOICE OF 6- OR 12-YEAR LIMITED TANK WARRANTY** – Standard 6-year warranty for tank and component parts. Upgraded 12-year limited tank warranty includes 12 years on the tank and 6 years on component parts. 12-year upgrade models will include a second anode rod for increased protection.

75 & 100 Gallon Capacities

76k & 80k BTU Input

Natural & LP Gas



Globally Recognized. Industry Respected.



Intertek

### SPECIFICATIONS AND APPLICATION DATA

www.americanstandardwaterheaters.com

#### DIMENSIONS IN INCHES


MODEL NUMBER	NOMINAL CAPACITY (GAL)	DOE RATED CAPACITY (GAL)	FIRST HOUR RATING (GAL)	BTU INPUT NAT & LP GAS	GPH RECOVERY @ 100° RISE	UNIFORM ENERGY FACTOR (UEF)	VENT DIAM (IN)	JACKET DIAM (IN) A	FLOOR TO					WATER CONNECTIONS DISTANCE (IN) G	APPROX. SHIP WEIGHT (LBS)
									TOP OF VENT (IN) B	TOP OF HEATER (IN) C	TOP OF WATER CONNECTIONS (IN) D	SIDE T&P (IN) E	GAS VALVE CONNECTION (IN) F		
G-75T2 AS	75	73	105	76,000	74	0.60	4	26 ½	69 ¼	62 ½	66 ¼	55	17	16	397
G-100T2 AS	100	95	124	83,000	78	0.57	4	28 ½	74	67	71	59 ½	17	16	531

#### RECOVERY IN GALLONS PER HOUR AT VARIOUS TEMPERATURE RISES

MODEL NUMBER	GAS TYPE	BTU INPUT	40°	50°	60°	70°	80°	90°	100°	110°	120°	130°	140°
G-75T2 AS	NAT or L.P.	76,000	185	148	123	105	92	82	74	67	62	57	53
G-100T2 AS	NAT or L.P.	80,000	198	158	131	112	98	86	78	70	64	59	55

#### MAX HOT WATER DELIVERABILITY AT VARIOUS CONNECTION SIZES

MODEL NUMBER	STORAGE CAPACITY	IN/OUT PORTS	T&P	GAS CONNECTION
G-75T2 AS	75	1	¾	½
G-100T2 AS	100	1 ¼	¾	½

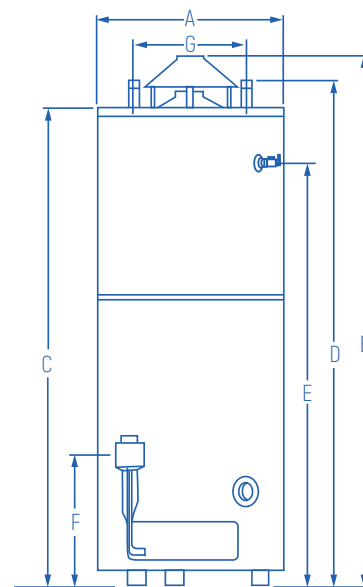

- For 12-year models, change the model number suffix from "6" to "12". Example: G-75T2-4-12.
- All models are certified at 300 PSI test pressure and 150 PSI working pressure.
- Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



#### SAMPLE SPECIFICATION

Water heater shall be AMERICAN STANDARD WATER HEATERS model \_\_\_\_\_ having a storage capacity of \_\_\_\_\_ gallons, operate on Natural or L.P. Gas with a BTU input of \_\_\_\_\_ and a recovery rate of \_\_\_\_\_ gallons per hour at 90°F temperature rise. Water heater tank interior shall be glass lined with Dura-Glas™, furnished with anode rod and insulation shall be non-CFC foam. Water heater shall be CSA certified.