

ULTRA-LOW NO_x ATMOSPHERIC

Residential Gas Water Heaters

American Standard[®]

WATER HEATERS

www.americanstandardwaterheaters.com

Features

- **ULTRA-LOW NO_x BURNER** – Complies with Southern California SCAQMD 2008 Rule 1121 and Northern California BAAQMD 2009 10ng/J NO_x emissions requirements.
- **VAPORSHIELD TECHNOLOGY** – Unique design that prevents flames from traveling backwards through the flame arrestor plate and outside of the water heater if flammable vapors are present, providing extra protection.
- **TRADITIONAL MECHANICAL GAS VALVE** – Simple and maintenance free operation.
- **SPARK IGNITER** – Easy push button pilot lighting in lieu of matches.
- **FACTORY INSTALLED ENERGY CUT-OFF SYSTEM** – Automatic thermostat with built-in gas pressure regulation also incorporates energy cut-off switch to prevent abnormally high water temperature for added safety.
- **TURBULENCE – INDUCING DIP TUBE** engineered to reduce sediment build-up inside the tank.
- **FULL FLOW BRASS DRAIN VALVE** factory provided & installed, allows easy and quick drainage.
- **FACTORY INSTALLED HEAT TRAPS** reduce standby heat loss caused by heat mitigation to water pipes.
- **TEMPERATURE AND PRESSURE RELIEF VALVE** factory provided & can be relocated from side to optional top of the heater.

Performance

- **Up TO 0.66 UEF**
- **UP TO 86 GALLONS FIRST HOUR RATING (FHR)**
- **HFO FOAM INSULATED** – Up to 2 inch-thick, environmentally-friendly insulation foam saves energy, reduces fuel cost by maximizing heat retention, and contributes to overall energy efficiency.
- **SELECT MODELS CERTIFIED TO 10,100 FEET**
- **CSA DESIGN CERTIFIED** – All models design tested and certified in accordance with CSA / ANSI Z21.10.1 * CSA 4.1.
- **AHRI ENERGY CERTIFIED** – Energy Efficiency tested in accordance with D.O.E. test procedures, meets or exceeds the requirements of ANSI, ASHRAE, and National Appliance Energy Conservation Act.

Quality

- **HEAVY GAUGE STEEL TANK** for extra years of trouble-free service.
- **GLASS-LINED TANK** with DuraGlas™ and fired at 1600°F for optimum protection from the effects of corrosion.
- **ALUMINUM ANODE ROD** to prolong tank life.
- **CHOICE OF 6- OR 12-YEAR LIMITED TANK WARRANTY** – Standard 6-year warranty for tank and component parts. Upgraded 12-year limited tank warranty includes 12 years on the tank and 6 years on component parts. 12-year upgrade models will include a second anode rod for increased protection.

225 Dyer St., Providence, RI 02903
Toll Free: (800) 323-9651

30, 40 & 50 Gallon Capacities
Tall & Low Boy Configurations
Up to 40k BTU Input
Natural Gas



Globally Recognized. Industry Respected.

GN 11.05.25

SPECIFICATIONS AND APPLICATION DATA

www.americanstandardwaterheaters.com

DIMENSIONS IN INCHES

DIMENSIONS IN INCHES									FLOOR TO					
MODEL NUMBER	NOMINAL CAPACITY	DOE RATED CAPACITY	FIRST HOUR RATING	BTU INPUT NAT GAS	GPH/LPH RECOVERY @ 90° RISE	UNIFORM ENERGY FACTOR (UEF)	VENT DIAM (IN)	JACKET DIAM (IN)	TOP OF HEATER (IN)	TOP OF WATER CONNECTIONS (IN)	SIDE T&P (IN)	TOP OF VENT (IN)	WATER CONNECTIONS DISTANCE (IN)	APROX SHIP WEIGHT
	(GAL.)	(GAL.)	(GAL.)				A	B	C	D	E	F	G	(LBS)
TALL														
GN30T1-3-6	30	29	70	35,000	33	0.60	3	16 ½	59	60 ½	53	62 ¼	8	134
GN40T1-3-6*	40	38	68	40,000	38	0.59	3	18 ½	59 ¼	60 ¾	54	62 ½	8	145
GN50T1-3-6*	50	47	85	40,000	38	0.63	3	20 ½	57 ¾	59 ¼	51 ¼	61	8	161
GN30T2-3-6	30	29	67	35,000	33	0.60	3	18 ½	59	60 ½	53	62 ¼	8	137
GN40T2-3-6*	40	38	73	40,000	38	0.60	3	20 ½	59 ¼	60 ¾	53	62 ½	8	154
GN50T2-3-6*	50	47	86	40,000	38	0.66	3	22 ½	57 ¾	59 ¼	51 ¼	61	8	167
LOW BOY														
GN30L2-3-6	30	29	66	35,000	33	0.60	3	20 ½	47 ¼	48 ¾	41	50 ¾	8	137
GN40L2-3-6	40	38	62	37,000	35	0.60	3	22 ½	49	50 ½	42 ½	52 ½	8	153
GN50L2-3-6	50	48	78	40,000	38	0.65	3	24 ½	49 ¾	51 ¼	42 ¾	53	8	183


Recovery capacity based on actual performance tests

*Model certified to 10,100 feet

- For 12-year models, change the model number suffix from "6" to "12". Example: GN-40L2-3-12.
- All models meet SCAQMD 2008 Rule 1121 and Northern California BAAQMD 2009 10ng/J NOx emissions requirements.
- All models comply with NAECA requirements.
- All models are certified at 300 PSI test pressure and 150 PSI working pressure.
- Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

SAMPLE SPECIFICATION

Water heater shall be AMERICAN STANDARD WATER HEATERS model _____ having a storage capacity of _____ gallons, operate on Natural Gas with a BTU input of _____ and a recovery rate of _____ gallons per hour at 90°F temperature rise. Water heater tank interior shall be glass lined with Dura-Glas™, furnished with anode rod and insulation shall be non-CFC foam. Water heater shall be CSA certified.

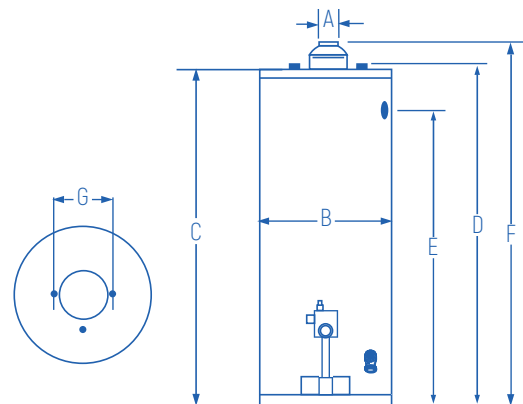

Globally Recognized. Industry Respected.